


freedom

GM-LiquidSpring




The innovative Freedom is the only bus of its kind, offering all the benefits of a low floor bus at a competitive price and making superior accessibility available to everyone.


24', 12+4 Passenger, 2 w/c

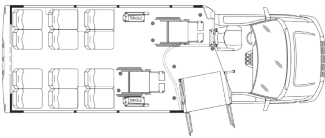


26', 13+7 Passenger, 3 w/c

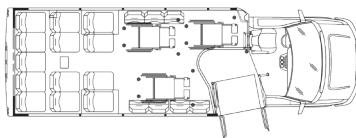

26', 14+4 Passenger, 2 w/c

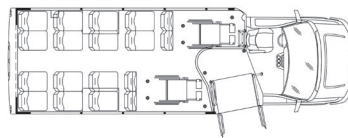

28', 16+4 Passenger, 2 w/c

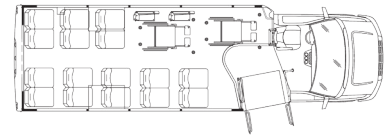

Standard Features

Specifications

| |
|--|
| GM4500 with GVWR 14,200 lbs. |
| GVWR Front Axle: 4,600 lbs. |
| GVWR Rear Axle: 9,600 lbs. |
| Engine: Vortec 6.6L Gas |
| Transmission: 6-Speed Automatic |
| Brakes: Heavy Duty Disc Brakes with four-wheel ABS |
| Park Brake: Internal Rear Disc |
| Alternator: 220 Amp |
| Battery: Dual Batteries, 770 CCA |
| Hour Meter |
| Tires: LT225/75RX16D/E on White Steel Rims |
| Fuel Tank: 57 Gallons |
| 50 State Emissions |
| Shuttle Bus Package (Includes): Chrome Appearance Package (Chrome grille with dual composite halogen headlamp) |
| Tilt/Cruise |
| Mirror: Inside Rearview Day/Night |
| Horn: Dual Note Tone |
| Power Ports: (2) 12-Volt Outlets, (1) 110-Volt Outlet |
| Rear-Only or Four-Corner Liquid Spring Kneeing Suspension |

Base Models

| |
|------------------------------------|
| 24' 165" WB/24'-1" Overall Length |
| 26' 191" WB/26'-3" Overall Length |
| 28' 210" WB/27'-10" Overall Length |

Interior

| |
|--|
| OEM Driver Console w/Cup Holder |
| Entry Assist Handles - Stainless Steel |
| One Piece FRP Interior Walls/Ceiling |
| Door Header Access Panel |

Construction

| |
|---|
| All Tubular Steel Cage Construction |
| Bolt & Bonded Construction |
| Full Laminated Body |
| Body Width: 96" (does not include mirrors) |
| Body Height: 115" (does not include roof hatch or AC) |
| Seating Capacity: Theater Seating up to 21 Passengers |
| Wheel Chair Capacity: up to 8 |
| Interior Wheel Housings completely encapsulated w/Poly Urea Coating |
| 5/8" Wood Floor (edges sealed prior to installation) |
| Meets all applicable FMVSS Regulations including FMVSS 214 - Side Impact Protection, FMVSS 220 - Rollover Protection, FMVSS 221 - Joint Strength, and FMVSS 301 - Fuel System Integrity |

Electrical

| |
|---|
| LED Interior/Exterior Lights (Except GM) |
| Interior Passenger Lights "ON" with door |
| Auxiliary Battery Compartment w/Tray and Door |
| Switches Mounted on Driver's Console |
| Master Battery Disconnect Switch |
| Backup Alarm |

Exterior Body and Lights

| |
|--------------------------------------|
| Rear Center Mounted Brake Light -LED |
| Exterior Light at Entry Door - LED |
| Black Rubber Rear Wheel Well Flares |
| One Piece Exterior FRP Wall/Skirt |
| Heated/Remote Mirrors |
| Exterior Ramp & Door Toggle Switches |

Door and Body

| |
|--|
| Solid Framed Windows |
| Egress Window Lights |
| Large Curb View Window |
| Electric Outward Opening Entrance Door w/39" Clear Opening (35" w/Handles) |
| Rear Egress Window (24 x 60) - Emergency Door Option |